

4 INCH PORTABLE PRINTER

LK-P43

- ☑ Compact and rugged design
- ☑ Peel off function
- ☑ IP44 certified/ IP54 certified: protection against dust and water
- ☑ Large capacity of paper roll up to 56mm (OD)
- ☑ Adjustable paper width from 50~108mm
- ☑ Flexible connectivity including RS-232C, USB, Bluetooth or Wi-Fi(802.11a/b/g)
- ☑ Prints at 80mm per second
- ☑ Fast AC charger and long life battery
- ☑ Color Graphic LCD 128×64 dots



LK-P43

Product Image

TOP




LEFT



RIGHT



Control Panel Usage

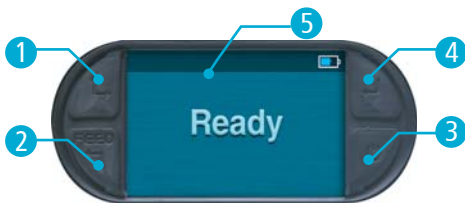

- 1 MENU
- 2 PAPER FEED
- 3 POWER
- 4 MENU SELECTION
- 5 LCD WINDOW

Specification

Model	LK-P43	
Printer Mechanism	4inch label & receipt	
Media	Receipt, Label	
Media width	50~108mm	
Media size	56mm diameter	
Resolution	203 DPI	
Print width	104mm	
Print speed	80mm/sec(Label 60mm/sec)	
Fonts	Font A, Font B, Download bitmap and true type font	
LCD	Color Graphic LCD 128×64 dots	
Barcode symbols	1D	UPC-A, UPC-E, EAN-8, EAN-13, EAN-128, RSS, Postnet, CODE39, CODE93, CODE128, ITF, CODABAR
	2D	PDF417, QR code, Maxicode, GS-1, Datamatrix, Aztec
Interface	Standard	RS-232(mini DIN connector), USB
	Option	Bluetooth, Wi-Fi
Driver	Windows (2000, XP, Vista, 7, 8), Symbian OS Windows mobile(Pocket PC, 2003, 6x), Android, Windows CE 4.2/5.0/6.0, Linux, Blackberry	
Emulation	ESC/POS, ZPL, CPCL Command compatible	
Sensor	Gap, Black mark, Paper end, Peeler	
Option	Battery cradle, Car charger, Shoulder strap, Belt clip	
Battery	Hard pack 7.4V 2600mAh, 5200mAh	
Method of charge battery	AC / DC charger	
Impact resistance	1.5M(standard)	
IP	IP 44 certified/ IP 54 certified	
Environ-ment data	Operating	-10 ~ 50 C / 10 ~ 90% RH
	Storage	-20 ~ 60 C / 10 ~ 90% RH
Feature	Dual injection, LCD, Peeler	
Dimensions	154(W)× 174(D) × 80 (H) mm	
Weight	1Kg (With battery)	



SEWOO TECH CO.,LTD.

28-6, Gajangsaneopdong-ro, Osan-si, Gyeonggi-do, 447-210, Korea

T. +82-31-459-8200 F. +82-31-459-8880

<http://www.miniprinter.com>