


Rugged Tablet PC

NE-Q11

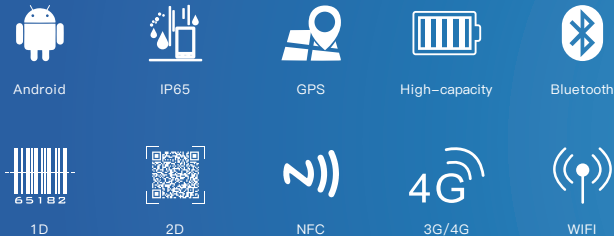

Functions

- Support for Android 9.0 system
- Integrated 4G all network communication, WiFi, Bluetooth and other communication modes
- 8000mAh battery, 6–8 hours of machine endurance
- IP65 high protection level, in accordance with MIL–STD–810G
- Support GPS, GLONASS, more accurate positioning
- Support 13 million pixel auto focus camera, easy to collect images and video information
- Support 1D / 2D, NFC and other functional modules for free selection

Product Six Views



Specification Parameter

Basic parameters	
Dimension	275.5 x 187.5 x 22mm
Weight	device unit 1000g
Device Color	black
LCD	10.1inch IPS 16:10, 800*1280
Touch Panel	5points Capacitive, G+G, Corning Gorilla Glass
Camera	Front 5.0MP Rear 13.0MP
I/O	USB 2.0 x 1, USB 3.0 x 1 SIM Card x 1, TF Card x 1 HDMI 1.4a x 1 12pins Pogo Pin x 1 Φ3.5mm standard earphone jack x 1 Φ3.5mm DC jack x 1
Power	AC100V ~ 240V, 50Hz/60Hz output DC 5V/2A
GPS	support GPS, QZSS, glonass

Optional modules	
NFC	Support ISO/IEC 14443A protocol Card reading distance: 3–5cm
1D	MOTO SE655E100R, Optical Position: 5mil, Scan speed: 50/s
2D	Honeywell N3680, Optical Position: 5mil, Scan speed: 50/s

Performance parameter	
CPU	MSM 8953
OS	Android 9.0
RAM	4GB LPDDR3
ROM	64GB

Battery	
Capacity	3.7V/8000mAh
Type	Built-in Li-polymer battery
Endurance	8hrs

Network connections	
WIFI	2.4G+5G dual band WIFI, IEEE 802.11(a/b/g/n/ac)
Bluetooth	BT4.2 (BR/EDR+BLE)
3G/4G	LTE FDD: B1/B3/B5/B7/B8/B20 LTE TDD: B38/B40/B41 WCDMA: B1/B2/B5/B8 GSM: 850/900/1800/1900MHz

Reliability	
Operate Temperature	-10 °C ~ 50 °C
Store Temperature	-20 °C ~ 60 °C
Humidity	95% Non-Condensing
IP Grade	IP65

Optional Accessories



Docking Charger



Bandage



Vehicle Mount

Application Range

Various modules and accessories can be selected to meet customers' application in various industries.

